


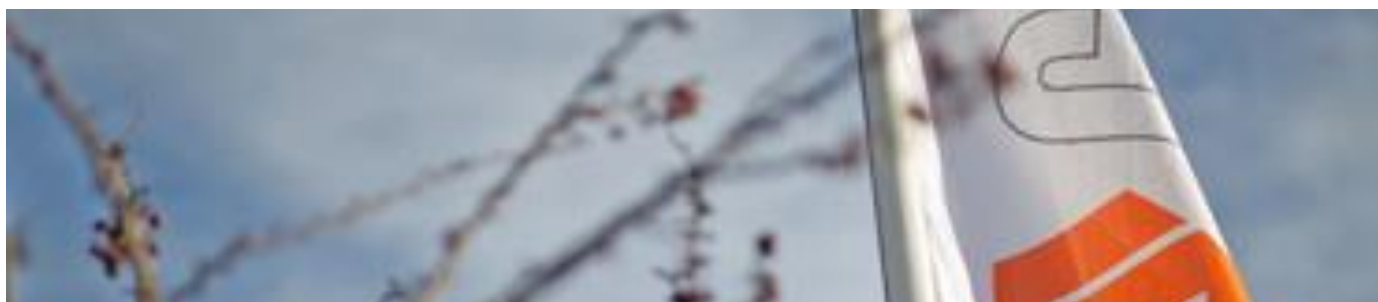

Product Portfolio Furex®

Fire Extinguishing Powders

ABC Powder	Active Component	A-Rating	B-Rating
Furex® ABC Vesta	Proprietary	43A	183B
Furex® ABC Genius	MAP (11.0%)	55A	233B
Furex® ABC Spezial	MAP (21.5%)	55A	233B
Furex® ABC 40	MAP (40.0%)	55A	233B
Furex® ABC 650	MAP (48.0%)	55A	233B
Furex® ABC 770	MAP (91.0%)	55A	233B

Additionally there are further grades with different MAP qualities available

BC Powder	Active Component	A-Rating	B-Rating
Furex® BCE 20	Sodium bicarbonate (20.0%)	-	113B
Furex® BCE 80	Sodium bicarbonate (94.0%)	-	233B
Furex® BCE 300	Sodium bicarbonate (67.0%)	-	233B
Furex® K	Potassium bicarbonate (90.0%)	-	233B

D Powder	Fire Class
Furex® Magna D	D

Fire Extinguishing Liquids

Ready-mixed-Solution	Lowest appl. Temperature	Density	A-Rating	B-Rating	F-Rating
Furex [®] Forte Bio Plus	+5 °C	1.04 g/cm ³	27A	144B	-
Furex [®] Optima F	-25 °C	1.17 g/cm ³	27A	144B	-
Furex [®] Casa Bio	-30 °C	1.22 g/cm ³	21A	-	75F

Additive	Application	Lowest appl. Temperature	A-Rating	B-Rating
Furex [®] A	A-Booster	+5 °C (5%)	27A (5%)	-
		±0 °C (10%)	34A (10%)	-
		-5 °C (20%)	43A (20%)	-
Furex [®] Pure B	B-Concentrate	+5 °C	-	Up to 183B
Furex [®] KS 930	Antifreeze	Up to -50 °C	21A	-
Furex [®] NM940	Surfactant	+5 °C	21A (2,5%)	-

Foam Concentrate	Fire Class	Freezing Point	Foaming Rate	A-Rating (tap water)	B-Rating (tap water)
Furex [®] MBS	AB (EN 1568-3)	-8 °C	4 (±1)	27A (5%)	-

**Ratings achieved with a popular 6 kg / liter fire extinguisher of European origin*

For more information, please contact our nearest office

Caldic Germany GmbH
 furex@caldic.de
 www.furex.de

Phone +49 (0)211-7346 -0
 Follow our latest updates on LinkedIn

